

VOLUME 2 NO. 2
DEC 2005

ISSN 1675-7009

SCIENTIFIC RESEARCH JOURNAL



INSTITUTE OF RESEARCH, DEVELOPMENT AND COMMERCIALISATION



SCIENTIFIC RESEARCH JOURNAL

Chief Editor

Prof. Dr. Zaiki Awang,
Universiti Teknologi MARA, Malaysia

Managing Editor

Assoc. Prof. Dr. Razidah Ismail,
Universiti Teknologi MARA, Malaysia

Editorial Advisory and Review Board

Prof. Dr. Ir. Wahyu Kuntjoro, Universiti Teknologi MARA, Malaysia
Assoc. Prof. Dr. Salmiah Kasolang, Universiti Teknologi MARA, Malaysia
Assoc. Prof. Ir. Dr. Muhammad Azmi Ayub, Universiti Teknologi MARA, Malaysia
Prof. Dr. Ichsan Setya Putra, Bandung Institute of Technology, Indonesia
Prof. Dr. Mohd. Nasir Taib, Universiti Teknologi MARA, Malaysia
Prof. Dr. Ir. Shah Rizam Mohd. Shah Baki, Universiti Teknologi MARA, Malaysia
Prof. Dr. Titik Khawa Abd. Rahman, Universiti Teknologi MARA, Malaysia
Prof. Dr. Luciano Boglione, University of Massachusetts Lowell, USA
Prof. Dr. K. Ito, Chiba University, Japan
Prof. Dr. Azni Zain Ahmed, Universiti Teknologi MARA, Malaysia
Prof. Ir. Dr. Ideris Zakaria, Universiti Malaysia Pahang, Malaysia
Prof. Dr. Abd. Aziz Dato' Abd. Samad, Universiti Tun Hussein Onn, Malaysia
Prof. Sr. Ir. Dr. Suhaimi Abd. Talib, Universiti Teknologi MARA, Malaysia
Assoc. Prof. Ir. Dr. Kartini Kamaruddin, Universiti Teknologi MARA, Malaysia
Assoc. Prof. Dr. Hamidah Mohd. Saman, Universiti Teknologi MARA, Malaysia
Dr. Robert Michael Savory, Universiti Teknologi MARA, Malaysia
Assoc. Prof. Dr. Mohd Hanapiah Abidin, Universiti Teknologi MARA, Malaysia

Copyright © 2005 Universiti Teknologi MARA, 40450 Shah Alam, Selangor, Malaysia.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means; electronics, mechanical, photocopying, recording or otherwise; without prior permission in writing from the Publisher.

Scientific Research Journal is jointly published by Institute of Research, Development and Commercialisation (IRDC) and University Publication Centre (UPENA), Universiti Teknologi MARA, 40450 Shah Alam, Selangor, Malaysia.

The views and opinion expressed therein are those of the individual authors and the publication of these statements in the Scientific Research Journal do not imply endorsement by the publisher or the editorial staff. Copyright is vested in Universiti Teknologi MARA. Written permission is required to reproduce any part of this publication.

1.	An Intelligent Optical Fibre pH Sensor Based on Sol-Gel Advanced Material and Artificial Neural network <i>Mohd Nasir Taib</i> <i>Faiz Bukhari Mohd Suah</i> <i>Musa Ahmad</i>	1
2.	Microwave Non-Destructive Testing of Coatings and Paints Using Free Space Microwave Measurement <i>Norhayati Hj Hamzah</i> <i>Deepak K. Ghodgaonkar</i> <i>Kamal Faizin Hj Che Kasim</i> <i>Zaiki Awang</i>	17
3.	Classification and Identification of Power System Disturbances Using Wavelet and Artificial Neural Network Technique <i>Noraliza Hamzah</i> <i>W. Norainin W. Abdullah</i> <i>Pauziah Mohd Arshad</i>	25
4.	Free Space Characterization of Silicon Wafers for Microelectronic Applications <i>Zaiki Awang</i> <i>Deepak Kumar Ghodgaonkar</i> <i>Noor Hasimah Baba</i>	35
5.	Influence of Waste Concrete Aggregates on the Performance and Durability of OPC Concrete <i>Ahmad Ruslan Mohd Ridzuan</i> <i>Azmi Ibrahim</i> <i>Abdul Manaff Mohd Ismail</i>	49

6. **Design and Fabrication of a Robotic Arm For Material Handling** 61
 P Nageswara Rao
 Anuar Ahmad
 Abdul Rahman Omar
 Muhammad Azmi Ayub
7. **Effect of Varied Probe Length on the Resonant Frequency of a Circular Cross-Sectional Cavity** 79
 Mohd Khairul Mohd Salleh
 Mohamad Syukri Suhaili
 Zuhani Ismail
 Zaiki Awang

Effect of Varied Probe Length on the Resonant Frequency of a Circular Cross-Sectional Cavity

Mohd Khairul Mohd Salleh¹, Mohamad Syukri Suhaili,
Zuhani Ismail & Zaiki Awang

Faculty of Electrical Engineering
Universiti Teknologi MARA (UiTM), Malaysia
¹Email: no31@time.net.my

ABSTRACT

A simple design of a metallic circular cross-sectional air-filled cavity is presented. Two probes of varied lengths are used to excite TE_{112} -mode wave into the cavity to give a resonant frequency of 5.86 GHz. The experiments show that the resonant frequency of the cavity resonator decreases as the lengths of the probes are increased. The shortest probe in the range of study gives the closest resonant frequency to the one desired.

Keywords: Circular cavity, Probe

Introduction

An electromagnetic cavity is a volume filled with air or other dielectric, limited by walls of electrical type (interfacing with a conductor) or of magnetic type (interfacing with a dielectric of higher permittivity). The cavity can have, in principle, any geometrical form but in practice, it has a cylindrical form with rectangular or circular cross-section. If, with an appropriate method, an electromagnetic field is introduced into the cavity, a standing wave will be produced whenever the conditions of resonance exist. A certain electromagnetic energy is then said to be stored in the

cavity. The study of the conditions of resonance of the cavity allows defining the resonant modes as well as the resonant frequencies of a cavity [1]. Cavities find applications in filters (in satellite, radar, wireless communications etc.) for their special characteristic of having very high quality factor (Q) (up to few thousands) when combined with high permittivity dielectric resonator [2]. The importance of cavities goes well away from their utilization as a resonant element or as a frequency-meter in the hyper-frequency circuits. They are, in fact, used for the determination of the complex permittivity of gases or of small dimension material samples. They are also used to fix the resonant frequency of solid-state or tube oscillators (such as klystron).

A number of techniques can be used to excite electromagnetic wave into a cavity, such as the use of probe coupler, aperture (slot) coupler by mean of a waveguide, and the use of loop coupler [3]. A probe – the stub contact panel socket, feeds the cavity presented in this paper. Being easily found in the market, the probe (shown in Figure 1) can be connected to the most commonly used semi-rigid microwave cables.

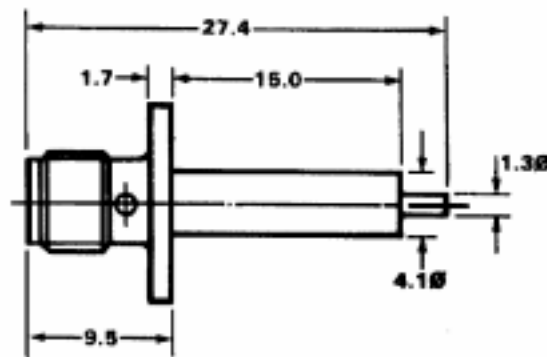


Figure 1: Stub Contact Panel Socket

A circular cross-sectional cavity of metallic walls is designed to resonate at 5.86 GHz and two probes (the stub contact panel sockets) are introduced at the input and output port of the cavity, respectively, to excite and collect the TE_{112} -mode wave. The length of the probes is varied to allow observation on its effect on the resonant frequency.

The Cavity

The design starts with the equation relating the resonant frequency to the dimensions of the circular cross-sectional cavity for a mode chosen, as given below [4]:

$$(f_r)_{mn}^{TE^z} = \frac{1}{2\pi\sqrt{\mu\epsilon}} \sqrt{\left(\frac{\chi'_{mn}}{a}\right)^2 + \left(\frac{p\pi}{h}\right)^2} \quad (1)$$

where,

- f_r : resonant frequency of $TE_{mn}^{TE^z}$ -mode
- χ'_{mn} : the m^{th} root of Bessel function derivative of n^{th} order.
- a : radius of the cavity
- h : half-length of the cavity
- $p = 1, 2, 3, \dots$
- μ : permeability of the dielectric filling the cavity
- ϵ : permittivity of the dielectric filling the cavity

For the chosen TE_{112} -mode and air-filled cavity, the values of p , χ'_{mn} , ϵ and μ are automatically fixed to 2, 1.8412, 8.854×10^{-12} F/m and $4\pi \times 10^{-7}$ H/m respectively. Fixing the resonant frequency f_r at 5.86 GHz leaves us with the last two values a and h to be determined. A good combination of these values of a and h to give an optimal size of the cavity is found to be 25.00 mm and 31.965 mm respectively. The conductor chosen to be the wall of the cavity is aluminum. Considered as cheap, aluminum is also categorized as a good conductor with conductivity up to 3.54×10^7 S/m to reduce conductor loss in the cavity.

The probes are inserted into the cavity at the regions that has strong field component along the directions of the field solution [3]. For the chosen TE_{112} -mode, the field form is shown in Figure 2.

Figures 3 and 4 show the cavity layout and the complete cavity with the insertion of two probes.

Experiments are carried out by using a Vector Network Analyzer (VNA) where the forward reflection coefficients $|S_{11}|$ are measured for different lengths of probes. The lengths of probes chosen were 25 mm, 20 mm, 15 mm, 10 mm, 5 mm, 4 mm, 3 mm, and 1.5 mm. This can be done by soldering a piece of straight metallic line to the metallic point of the stub contact panel socket to get the length desired.

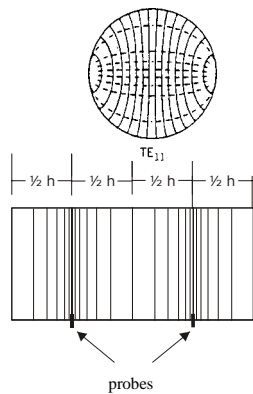


Figure 2: Electric Field Form

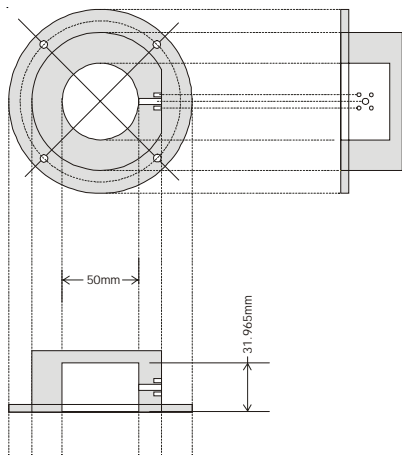


Figure 3: Cavity Layout

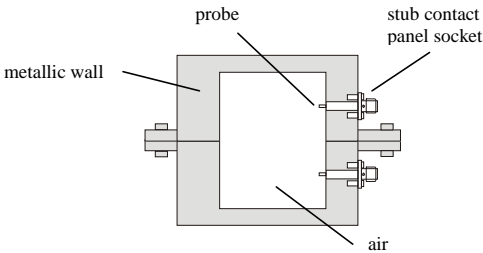


Figure 4: Complete Cavity Diagram

Experimental Results

From the results obtained, the signal is totally disturbed starting from the probe length of 6 mm and above. Observation on the resonant frequency therefore can only be done for the lengths of 5 mm, 4 mm, 3 mm and 1.5 mm and Figures 5-8 show the $|S_{11}|$ obtained respectively.

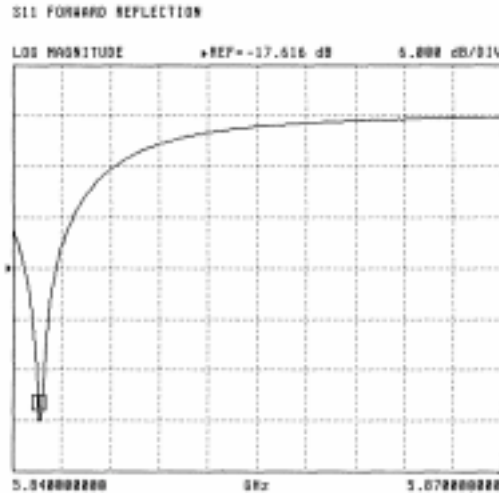


Figure 5: $|S_{11}|$ of Cavity with 5 mm Probe Length

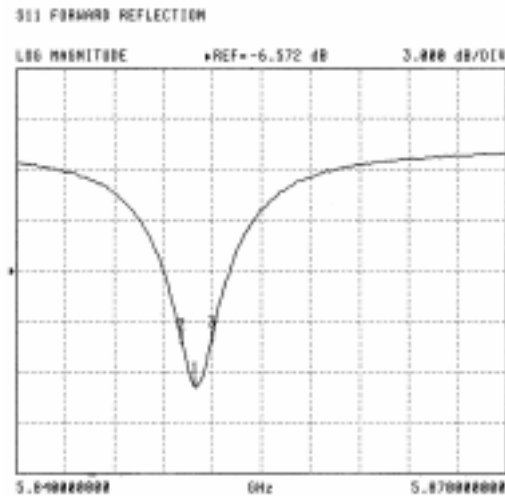


Figure 6: $|S_{11}|$ of Cavity with 4 mm Probe Length

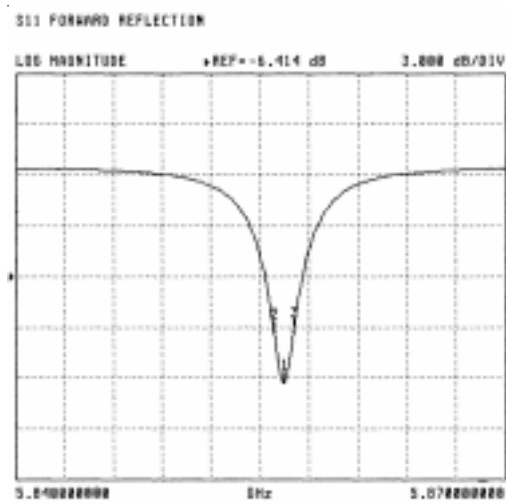


Figure 7: $|S_{11}|$ of Cavity with 3 mm Probe Length

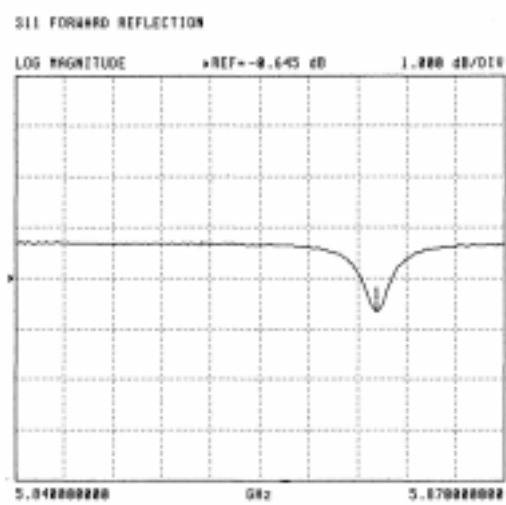


Figure 8: $|S_{11}|$ of Cavity with 1.5 mm Probe Length

It can be seen from the results that the resonant frequency of the cavity resonator decreases as the lengths of the probes are increased, as summarized in Table 1 and Figure 9.

Table 1: Resonant Frequency with Respect to Probe Length

Probe length (mm)	Resonant Frequency (GHz)
5	5.84165
4	5.85095
3	5.8565
1.5	5.8622

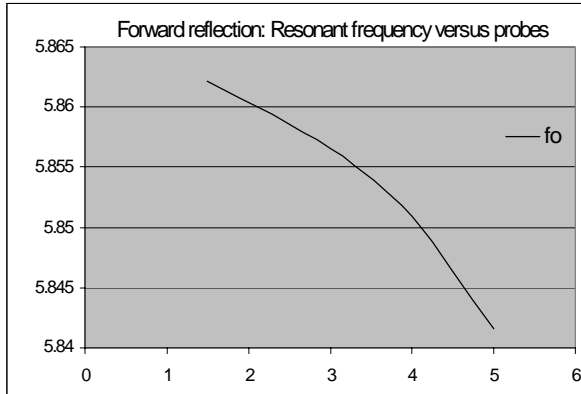


Figure 9: Resonant Frequency versus Probe Length

Amongst the lengths of probe studied, the shortest probe (1.5 mm) gives the closest resonant frequency to the one calculated, 5.86 GHz. However, the signal strength is found to be the lowest in this case, as shown by its $|S_{11}|$ which is only around 1.5 dB at the resonant frequency, whilst the value goes up to 36 dB for the case of 5 mm probe length.

Figure 10 shows the $|S_{11}|$ measured for the 1.5 mm probe length over a wider range of frequency. Other resonant frequencies are also found in the cavity. These resonant frequencies are all of other higher modes generated in the cavity.

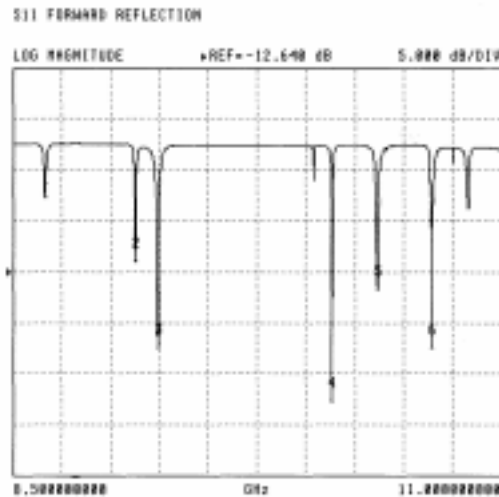


Figure 10: Measured $|S_{11}|$ over Wider Range of Frequency for 1.5 mm Probe

Conclusion

An air-filled circular cross-sectional cavity of metallic wall has been designed and tested to give a resonant frequency at 5.86 GHz for the fundamental mode TE_{11} . Two probes of varied length have been used to excite the wave and the experimental results show that the resonant frequency is shifted away from the calculated value as the length of the probes is increased, giving the best choice of length to be applied to the probe in order to obtain the most precise resonant frequency, which is the shortest probe (1.5 mm in this case of study).

References

- [1] Combes, P. F. 1996. *Micro-Ondes 1. Lignes, guides et cavités*, Dunod, Paris, France.
- [2] Ian C. Hunter, Billonet, L., Jarry, B. and Guillon, P. 2002. Microwave Filters – Applications and Technology, in *IEEE Transactions on Microwave Theory and Techniques*, vol. 50, pp. 794-805.

- [3] Gayle, F. M. 1996. *Lines and Electromagnetic Fields for Engineers*, Oxford University Press, New York, United States.
- [4] Balanis, C. A. 1984. *Advanced Engineering Electromagnetic*, John Wiley & Sons, New York, United States.